


20ft X 8ft Insulated ISO Cargo Container



- · Full opening swing cargo doors on one (1) end
- Forklift pockets (on some 20' units)
- · Aluminum T-grade floors
- · 3" thick foam insulation including the floor
- · Heavy gauge plastic or stainless steel interior lining

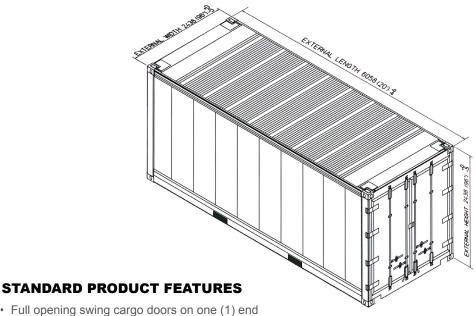

000000-R00

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

| | LENGTH | | HEIGHT | | WIDTH | | DOOR OPENING | |
|--------|-------------|------------|----------|----------|----------|----------|--------------|-------|
| | Exterior | Interior | Exterior | Interior | Exterior | Interior | Height | Width |
| Ft in | 19' 10 1/2" | 18' 6 1/2" | 8' 0" | 6' 10" | 8' 0" | 7' 4" | 6' 10" | 7' 4" |
| Metric | 6,058 | 5,652 | 2,438 | 2,083 | 2,438 | 2,235 | 2,083 | 2,235 |

| | TARE WEIGHT | PAYLOAD | GROSS WEIGHT | CUBIC CAPACITY |
|-----|-------------|---------|--------------|----------------|
| Lbs | 5,952 | 61,248 | 67,200 | 929 Cu. Ft. |
| Kgs | 2,700 | 27,780 | 30,480 | 26.3 Cu. M. |

ISO 9001:2008



ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

Phone: 856 . 303 . 1101