



10' X 8' 6" Standard Dry Freight Bicon Container, Double Doors Both Ends (Type 2)

SB842.6
10' X 8' 6" Standard Dry Freight Bicon Container, Double Doors Both Ends (Type 2)




PRODUCT FEATURES

STANDARD FEATURES

- Corrugated steel sides, and roof
- 14 gauge locking steel double end swing doors
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- Tie down steel lashing rings, 4000 lbs. cap. each
- (2) way fork lift pockets
- Vents, (2) each

OPTIONAL FEATURES

- Connecting couplers, (2) per Bicon
- Connecting coupler storage bracket (1) each
- Manifest box (2) each
- Adjustable shelving brackets (4) sets
- Decking and shoring beams (16) each

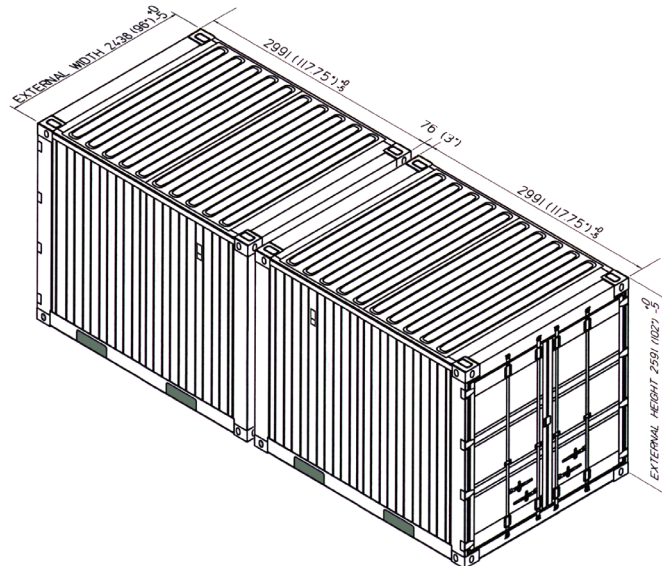

(2) Bicon Containers coupled together to form (1) 20' ISO module

012023-R00

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	9' 9-3/4"	9' 1-3/8"	8' 6"	7' 10-1/4"	8' 0"	7' 8-1/2"	7' 5-11/16"	7' 8-3/16"
Metric	2,991	2,778	2,591	2,394	2,438	2,350	2,278	2,341

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	3,350	23,105	26,455	552 Cu.Ft.
Kgs	1,520	10,480	12,000	15.6 Cu.M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001



CERTIFIED QUALITY MANAGEMENT SYSTEM