

Double Doors Both Ends Standard 20' x 8' 6" Dry Freight ISO Cargo Container




STANDARD FEATURES

- Corrugated steel sides, roof, and swing doors on both ends
- · Two-way laden forklift pockets
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- Wall tie down steel lashing rings, 6,000 lbs. cap. each (24 total)
- Door corner post tie downs, (20) total = restraint system, shoring slot will support 2" x 6" lumber
- · Vents, (2) each

OPTIONAL FEATURES

Manifest box (2) each

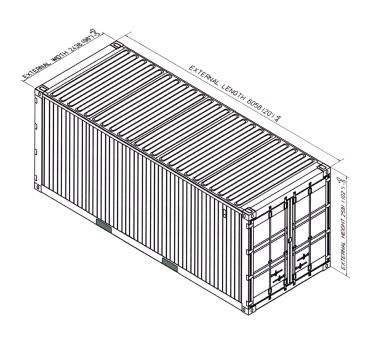

020416-R01

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

ALL NEW CONTAINERS AND MARKET AND TO THE LATTER TO CHARDANS								
SB862.6	LENGTH (+0/-6)		HEIGHT (+0/-5)		WIDTH (+0/-5)		DOOR OPENING (+0/-5)	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft. in.	19' 10 1/2"	19' 2 5/64"	8' 6"	7' 10 3/8"	8' 0"	7' 8 19/32"	7' 6 1/32"	7' 8 1/8"
Metric	6,058	5,844	2,591	2,397	2,438	2,352	2,287	2,340
	TARE WEIGHT		PAYLOAD		GROSS WEIGHT		CUBIC CAPACITY	
Lbs.	5,020		62,180		67,200		1,163 Cu. Ft.	
Kgs.	2,277		28,203		30,480		32.94 Cu. M.	

ISO 9001



MANAGEMENT SYSTEM



ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS