


Two Full Side Opening 20' X 8' Dry Freight ISO Cargo Container

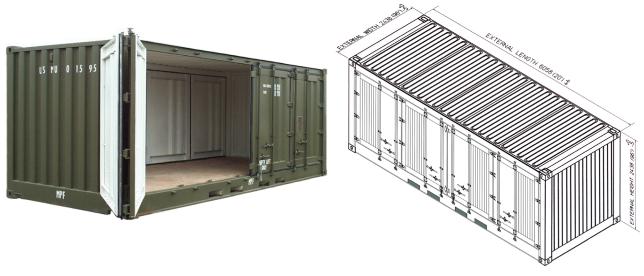

PRODUCT FEATURES

STANDARD FEATURES

- · Corrugated steel ends and bifold swing doors on both sides
- (2) sets of forklift pockets, laden and unladen
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- · Wall tie down steel lashing rings, 6,000 lbs. cap. each
- · Corner post tie downs
- · Floor recessed tie downs
- · Vents, (2) each

OPTIONAL FEATURES

- · Manifest box (2) each
- · 383 Green exterior CARC paint

020916-R01

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	19' 10 1/2"	19' 6 1/4"	8' 0"	6' 11 3/16"	8' 0"	7' 3 9/16"	6' 6 5/16"	18' 5"
Metric	6,058	5,950	2,438	2,113	2,438	2,224	1,989	5,613

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	8,050	44,860	52,910	987 cu. ft.
Kgs	3,650	20,350	24,000	27.9 cu. m.

ISO 9001





ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS