Double Doors One End High Cube 20' X 9' 6" Dry Freight ISO Cargo Container

PRODUCT FEATURES


STANDARD FEATURES

- Corrugated steel sides, roof, and swing doors on one end
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- Wall tie down steel lashing rings, 4,000 lbs. cap. each (24 total) tested at 6,000 lbs.
- Front corner post tie downs (10 total)
- Door corner post tie downs (10 total) = restraint system, shoring slot will support 2" x 6" lumber
- · Vents, (2) each

OPTIONAL FEATURES

- · Manifest box (2) each
- (2) sets of forklift pockets, laden and unladen
- · 383 Green exterior CARC paint



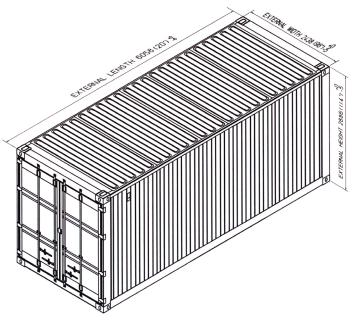

020916-R01

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	19' 10 1/2"	19' 4 11/64"	9' 6"	8' 10 1/4"	8' 0"	7' 8 17/32"	8' 5 11/16"	7' 8 11/64"
Metric	6,058	5,897	2,896	2,699	2,438	2,350	2,583	2,341

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	5,415	47,495	52,910	1,321 Cu.Ft.
Kgs	2,456	21,543	24,000	37.4 Cu.M.

ISO 9001



ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS